ABTS-125

Basic Transfer Switch User Manual

宏晉儀控
monicon

Web Site：http://www.monicon.com.tw
E-mail：sales@monicon.com.tw

Dimensions

BTS-125 (2/3/4) P is snap and fit type products. The whole case was made of iron plates with nickel-plated on the case surface to make it more rigid and more moisture-proof. The whole device not only can working on the current 125Amp but also can adapt to 125centigrade ambient working temperature. BTS-125(2/3/4) P is also equipped with manual operation device and a aux. switch built inside for more easy operation. In considerate of user's convenience, BTS-125(2/3/4) P can be installed vertical or horizontal for more easy installation.

ABTS-2P Drawing

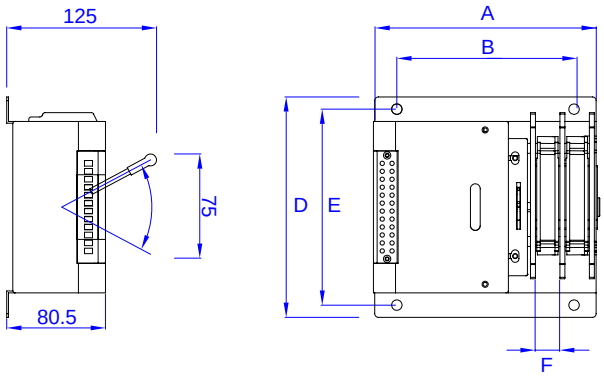

ABTS-3P Drawing

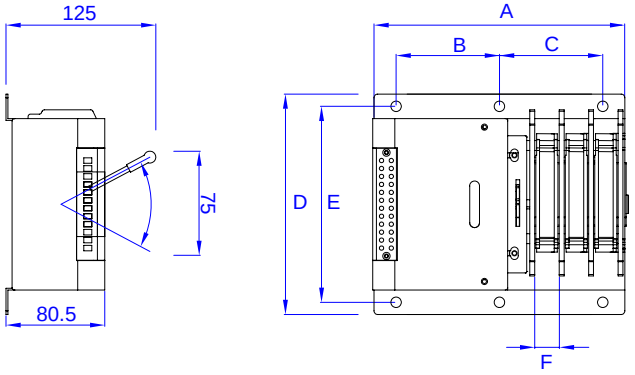

ABTS-4P Drawing

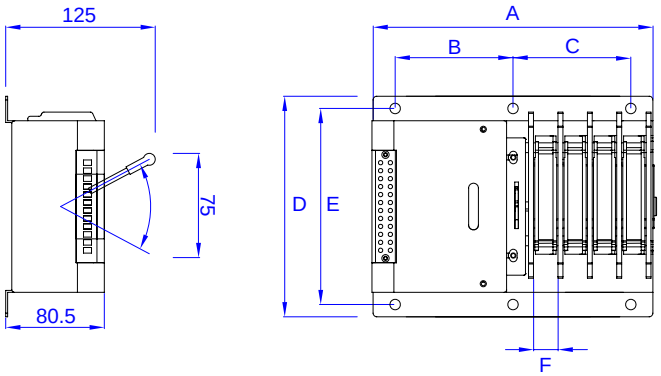

Dimension Sheet

Type / Dimensions	A	B	C	D	E	F
BTS-2P0125	181	144.5	X	180	160	20
BTS-3P0125	205	84.5	84.5			
BTS-4P0125	228	96.5	96.5			

Technical Sheet

Type		BTS-125		
Max Current（A）		125		
Auxiliary (A)		25		
Working Current（A）		3.5A		
Limited Short Current（KA）		5		
Coil Voltage (V)		220		
Endurance （Times）	Mechanical	10000		
	Electrical	8000		
Poles		2P	3P	4P
Weight (Kg)		2.95	3.25	3.5
Working Period（Sec）		3		

Wiring Example